

MaxiCharger DC Compact

50kW



MaxiCharger DC Compact

Big power and big value in a compact package





Fast and Effective

Built to increase charging efficiency

- Dual-ports provide up to 50kW of power
- Charge 2 vehicles simultaneously
- A 30 min charge equates to 138 km of range



Compact Design

Optimized for any location

- Ultra-compact with big DC power in a small package
- Flexible installation allows for fixed or mobile positioning
- DC Compact has low installation costs, meaning a faster ROI due to reduced capital expenditures for the site operator



Smart Advertising and Communication Platform

Improve your ROI

- User-friendly 21.5-inch LCD touch screen
- Powered by smart operating system, Android 10 with enhanced advertising placements
- Communicate, promote or attract customers generating new revenue streams

A Closer Look at the **MaxiCharger DC Compact**



OCPP Compliance



18 Safety Monitoring Items



Compatible with CCS2, CHAdeMO



One Stop Cloud Network Management



Plug & Charge



APP, RFID Card, Credit Card, Mobile Payment



| 1111 | 96% Charging Efficiency




Smart Charging



Weather Resistant



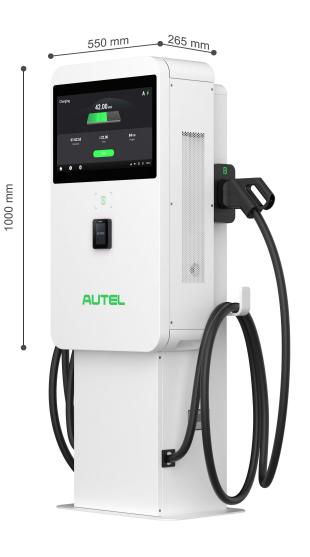

Technical Specifications

DC Output Connection

Charging modeMode 4: CCS2Output powerRated power 50kW

Output voltage150 - 950VMax ouput currentCCS2: 133ANumber of outputs2*CCS2Peak efficiency96%

AC Input Connection

Earthing system 3P, N, PE

Input voltage 3-phase 400V AC±10%

Input frequency50/60 HzPower factor≥0.99Harmonic distortion (THDi)≤5%

General Characteristics

IP and IK rating IP54; IK10
Operating altitude 2000m

Operating temperature range $-30^{\circ}\text{C} \sim +50^{\circ}\text{C}$ Storage temperature range $-40^{\circ}\text{C} \sim +70^{\circ}\text{C}$

Mounting Pedestal, wall mounting or wheels

Dimensions (H×W×D) 1000 × 550 × 265 mm

Screen type 21.5 inch LCD touch screen (1920*1080)

Cable length 5.5m standard; 7.5m optional

User Interface

Status indication LED / LCD / APP

User interface Autel Charge APP; Autel Charge Cloud

Connectivity 4G, Wi-Fi, Ethernet

Communication protocols OCPP 1.6J (Can be upgraded to OCPP 2.0.1 later)

User authentification APP, RFID card

Software Update OTA updates via web portal

Certification and Standards

Safety and compliance IEC 61851-23; IEC 61851-23; IEC 61851-21-2; ISO 15118

EMC compliance CE, EMC Class A

Warranty 24 months, warranty extension possible

 * All pictures shown are for illustration purpose only, actual product and specifications may vary due to product enhancement



Autel Europe GmbH

Phone: +49(0)89 540299608

E-mail: evinfo.eu@autel.com

Website: autelenergy.com

Autel Energy







